






Written on 21 October 2020 3 minutes of reading  
News

- Innovation and Industry
- Climate, environment and circular economy
- CO2 capture, utilization and storage

The four-year Dinamx “Demonstration and innovative applications of the DMX™ process” project\* has been launched by partners IFPEN, Total Refining & Chemicals and ArcelorMittal France. Coordinated by Axens, the objective is to demonstrate the DMX™ process designed to capture carbon dioxide from blast furnace gases and extend its scope of application to other types of emitters in order to reduce CO2 emissions in France.

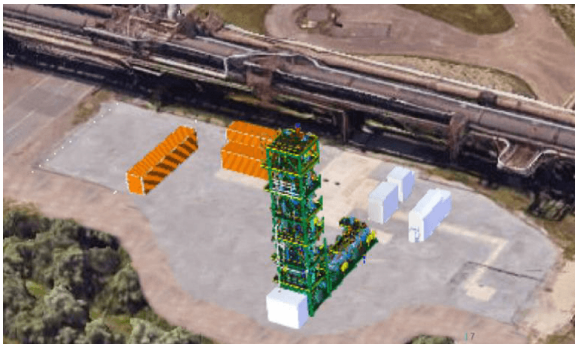

The process will initially be demonstrated on the pilot unit built for the European H2020 3D project at ArcelorMittal's site in Dunkirk, with a capacity of 0.5 t CO<sub>2</sub>/h. Other applications will be examined with a view to validating the potential benefits of the process for cement works, glassworks, urban heating and electricity production from biomass.

## **DMX™, a competitive decarbonization technology**

The result of a decade of research, the DMX™ process, developed by IFPEN and marketed by Axens, uses a solvent for separating CO<sub>2</sub> via absorption with a high capture capacity. Made up of a mixture of 2 amines in aqueous solution and initially forming a single phase, this so-called demixing solvent splits into two phases when in contact with flue gases laden with CO<sub>2</sub>. Since the CO<sub>2</sub> is concentrated in one of the two phases, this significantly reduces the volume to be treated during the energy-intensive phase, i.e., solvent regeneration by steam injection at a temperature of 160°C.

This competitive technology should make it possible to reduce the cost of CO<sub>2</sub> capture by 30% compared to more traditional processes and have an energy penalty of below 2.3 GJ/tCO<sub>2</sub> for the capture of at least 90% of emissions from a steelworks or coal-fired power plant. Every ton of CO<sub>2</sub> "avoided" will cost between 30 and 40 euros, compared with 50 euros with existing methods. Moreover, the CO<sub>2</sub> produced is extremely pure (99.7%) and under pressure (up to 7 bara), which facilitates the subsequent pressurization required to transport it either by boat or pipelines.

\*funded by Ademe following the Eco-Efficient Industry call for projects launched within the framework of the "Démonstrateurs et Territoires d'Innovation de Grande Ambition" (Ambitious Demonstrators and Innovative Territories) initiative incorporated in the French Investments for the Future program

### **Reminder**

**CO<sub>2</sub> capture and storage (CCS) technologies are crucial in order to achieve COP21 objectives. According to the IEA, they are set to account for 9% of the CO<sub>2</sub> emission reductions required by 2050 in order to reduce global warming to 2°C by 2100. In France, the biggest industrial CO<sub>2</sub> emitters are the electricity production sector (23 Mt), urban heating and other sectors (23 Mt) and the steel industry (18 Mt).**

>> To find out more : [CO<sub>2</sub> capture, utilization and storage](#)

CO<sub>2</sub> capture: launch of Dinamx, an industrial pilot demonstration project for the DMX process  
21 October 2020

Link to the web page :